



# CVH / CVS – We drive the Performance

CVH

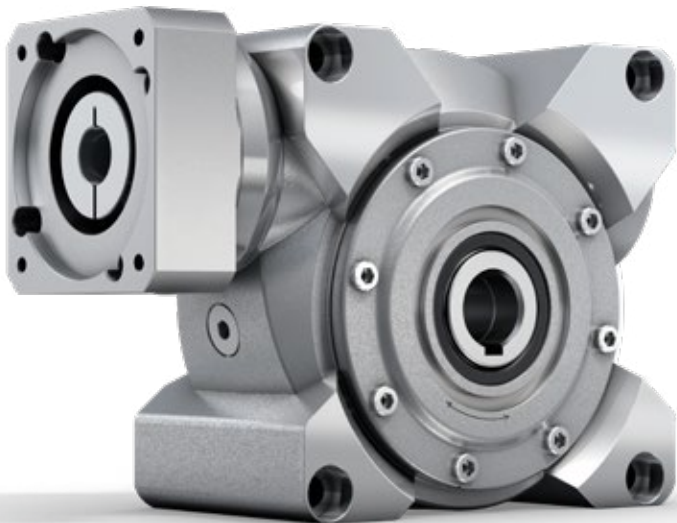

The V-Drive Basic is characterized by a specially developed toothing that minimizes operating noise during S1 operation and offers enormous power. And all with a top price/performance ratio.

## PRODUCT HIGHLIGHTS



### Optimized output bearings

The V-Drive Basic features an optimized output bearing tailored to the most diverse areas of application. For increased requirements for the absorption of external forces, the reinforced bearing option is used.




### Specially developed toothing

The operating noise during S1 operation has been minimized by means of a specially developed toothing featuring high torques, good synchronization, and very low operating noise.




### Top price/performance ratio

A top price/performance ratio is achieved with short delivery times and "made in Germany" quality.

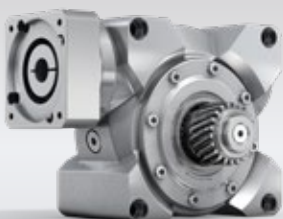

CVS – worm gearbox with pinion

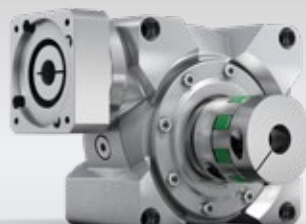


CVS – worm gearbox with elastomer coupling



cymex® select  
BEST SOLUTION WITHIN SECONDS

Efficient gearbox sizing within seconds –  
online without login  
[cymex-select.wittenstein-group.com](https://www.cymex-select.wittenstein-group.com)

CVS

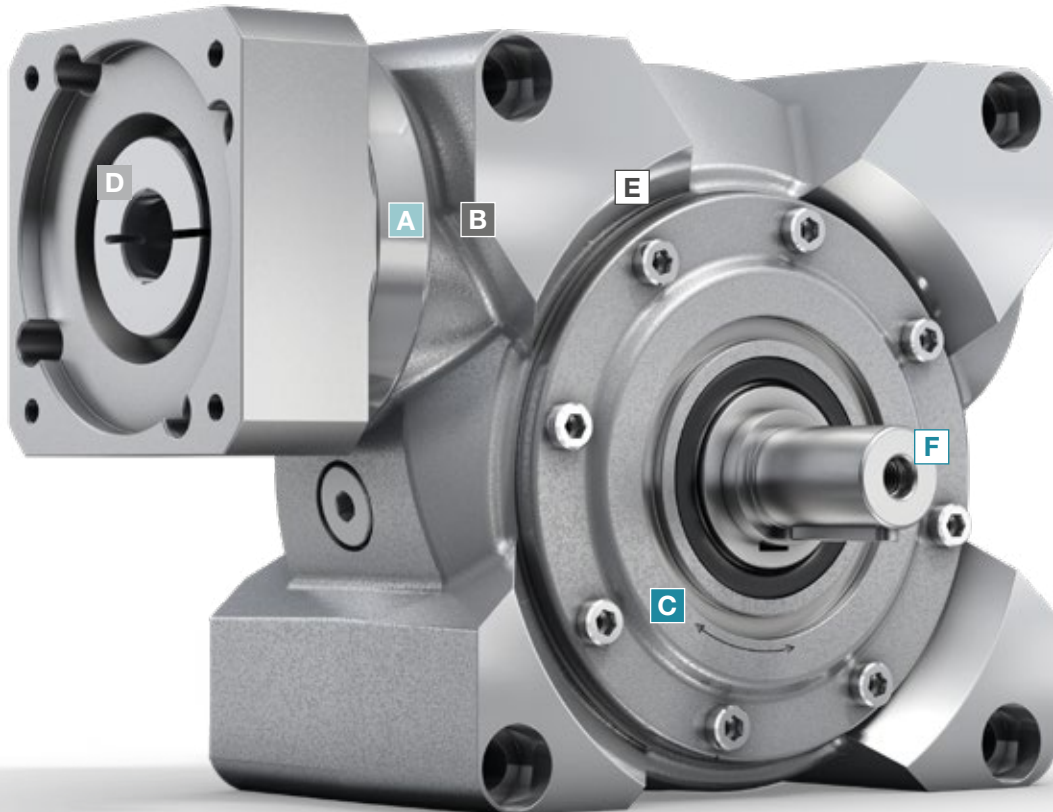

- A Radial shaft seal**
- Very long service life
  - Optimized for continuous operation

- B Input bearing**
- Bearing package to absorb axial and radial forces
  - Very well suited to high input speeds

- C Output bearing**
- Tailored to the most diverse areas of application

- D Metal bellows coupling**
- Completely backlash free
  - Lifetime durable and maintenance free
  - Easy assembly
  - Protects the motor through thermal linear expansion compensation

- E Toothing**
- Specially developed toothing, for high torques, good synchronization, and low operating noise

- F Multiple output configurations for greater flexibility**
- Hollow shaft interface
  - Keyed hollow shaft
  - Output on both sides
  - Smooth shaft
  - Shaft with key

# CVH 040 MF 1-stage

			1-stage						
Ratio	$i$		7	10	16	28	40		
Max. torque <sup>a) b)</sup> (at $n_1 = 500$ rpm)	$T_{2a}$	Nm	68	76	78	82	76		
		in.lb	602	673	690	726	673		
Emergency stop torque <sup>a) b)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	126	125	129	134	122		
		in.lb	1115	1106	1142	1186	1080		
Permitted average input speed <sup>d)</sup> (at 20 °C ambient temperature)	$n_{1N}$	rpm	4000						
Max. input speed	$n_{1Max}$	rpm	6000						
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	0.7	0.6	0.5	0.4	0.4		
		in.lb	6.2	5.3	4.4	3.5	3.5		
Max. backlash	$j_t$	arcmin	≤ 15						
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	3.5	3.5	3.5	3.5	3.5		
		in.lb/arcmin	31	31	31	31	31		
Max. axial force <sup>c)</sup> (Standard / HIGH FORCES)	$F_{2AMax}$	N	1200 / 3000						
		lb <sub>f</sub>	270 / 675						
Max. lateral force <sup>b)</sup> (Standard / HIGH FORCES)	$F_{2OMax}$	N	1000 / 2400						
		lb <sub>f</sub>	225 / 540						
Max. tilting moment (Standard / HIGH FORCES)	$M_{2KMax}$	Nm	97 / 205						
		in.lb	858 / 1814						
Efficiency at full load (at $n_1 = 500$ rpm)	$\eta$	%	89	87	81	72	66		
Service life	$L_h$	h	> 15000						
Weight (incl. standard adapter plate)	$m$	kg	4.5						
		lb <sub>m</sub>	10						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 54						
Max. permitted housing temperature		°C	+90						
		°F	+194						
Ambient temperature		°C	-15 to +40						
		°F	+5 to +104						
Lubrication			Lubricated for life						
Direction of rotation			See drawing						
Protection class			IP 65						
Shrink disc (Standard Version)			SD 024x050 S2						
Max. torque (without axial force)	$T_{max}$	Nm	250						
		in.lb	2213						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	$J_1$	kgcm <sup>2</sup>	0.42	0.39	0.37	0.36	0.35
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.37	0.35	0.33	0.32	0.31
	E	19	$J_1$	kgcm <sup>2</sup>	0.74	0.70	0.68	0.68	0.67
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.65	0.62	0.6	0.6	0.59

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

<sup>a)</sup> At max. 10 %  $F_{2OMax}$

<sup>b)</sup> Valid for standard clamping hub diameter


<sup>c)</sup> Refers to center of the output shaft or flange

<sup>d)</sup> Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]

1-stage


up to 14/19<sup>4)</sup> (C<sup>6)</sup>/E)  
clamping hub diameter

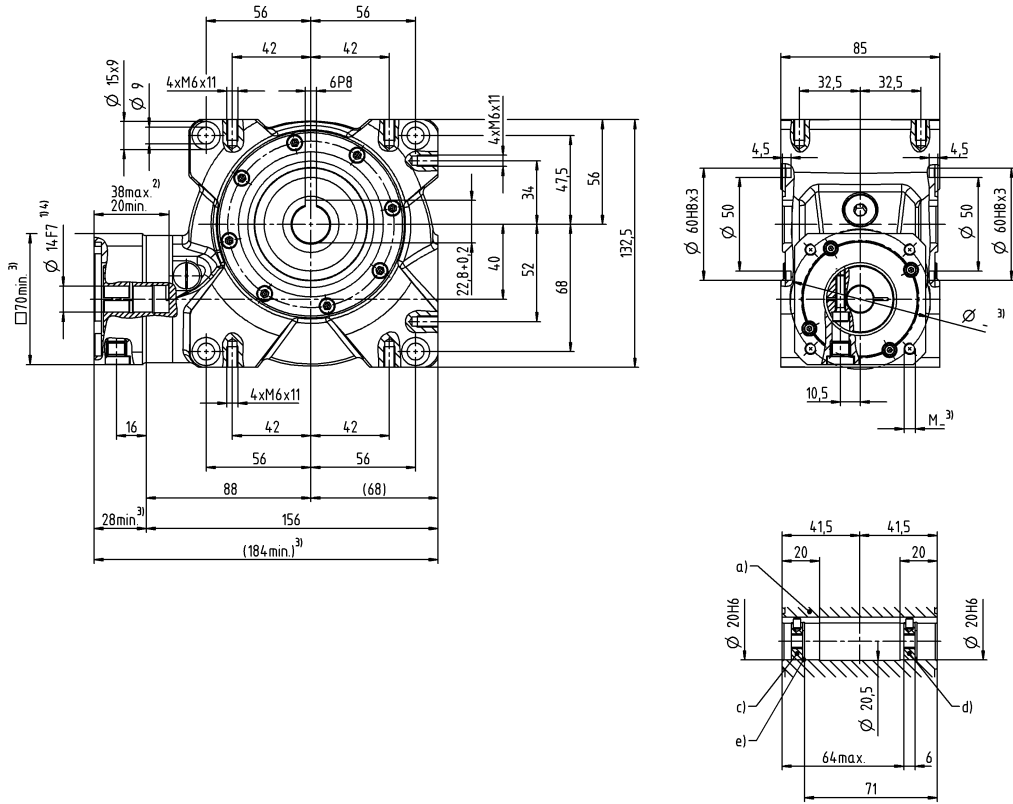

Worm Gearboxes  
Basic Line

Other output variants

Hollow shaft interfaces on both sides

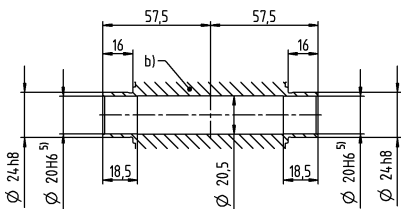

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M6 (on request)
- d) End disc as forcing washer for screw M8 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length  
Longer motor shafts are adaptable, please contact us
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum wall thickness of 1 mm
- <sup>5)</sup> Tolerance h6 for mounted shaft
- <sup>6)</sup> Standard clamping hub diameter

# CVH 050 MF 1-stage

			1-stage						
Ratio	$i$		7	10	16	28	40		
Max. torque <sup>a) b)</sup> (at $n_1 = 500$ rpm)	$T_{2a}$	Nm	125	127	131	140	116		
		in.lb	1106	1124	1159	1239	1027		
Emergency stop torque <sup>a) b)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	242	242	250	262	236		
		in.lb	2142	2142	2213	2319	2089		
Permitted average input speed <sup>d)</sup> (at 20 °C ambient temperature)	$n_{1N}$	rpm	4000						
Max. input speed	$n_{1Max}$	rpm	6000						
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	2.2	1.6	1.5	1.2	1.1		
		in.lb	19.5	14.2	13.3	10.6	9.7		
Max. backlash	$j_t$	arcmin	≤ 15						
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	5.5	5.5	5.5	5.5	5.5		
		in.lb/arcmin	49	49	49	49	49		
Max. axial force <sup>c)</sup> (Standard / HIGH FORCES)	$F_{2AMax}$	N	1500 / 5000						
		lb <sub>f</sub>	337.5 / 1125						
Max. lateral force <sup>b)</sup> (Standard / HIGH FORCES)	$F_{2OMax}$	N	1200 / 3800						
		lb <sub>f</sub>	270 / 855						
Max. tilting moment (Standard / HIGH FORCES)	$M_{2KMax}$	Nm	130 / 409						
		in.lb	1150 / 3620						
Efficiency at full load (at $n_1 = 500$ rpm)	$\eta$	%	89	85	80	70	63		
Service life	$L_n$	h	> 15000						
Weight (incl. standard adapter plate)	$m$	kg	8						
		lb <sub>m</sub>	18						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 62						
Max. permitted housing temperature		°C	+90						
		°F	+194						
Ambient temperature		°C	-15 to +40						
		°F	+5 to +104						
Lubrication			Lubricated for life						
Direction of rotation			See drawing						
Protection class			IP 65						
Shrink disc (Standard Version)			SD 030x060 S2V						
Max. torque (without axial force)	$T_{max}$	Nm	550						
		in.lb	4868						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	$J_1$	kgcm <sup>2</sup>	1.2	1.1	1.0	0.97	1.0
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	1.1	0.97	0.89	0.86	0.89
	G	24	$J_1$	kgcm <sup>2</sup>	1.3	1.2	1.1	1.1	1.2
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	1.2	1.1	0.97	0.97	1.1

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

<sup>a)</sup> At max. 10 %  $F_{2OMax}$

<sup>b)</sup> Valid for standard clamping hub diameter




<sup>c)</sup> Refers to center of the output shaft or flange

<sup>d)</sup> Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]


# 1-stage

up to 19/24<sup>4)</sup> (E<sup>6)</sup>/G)  
clamping hub diameter

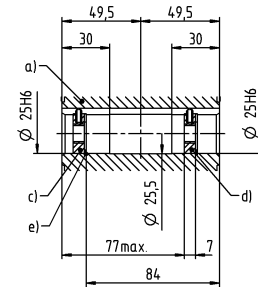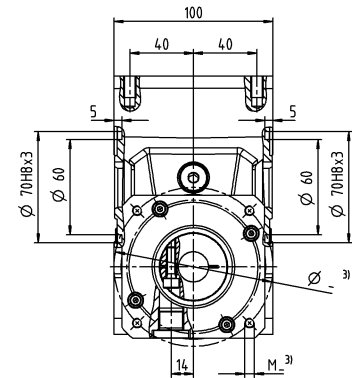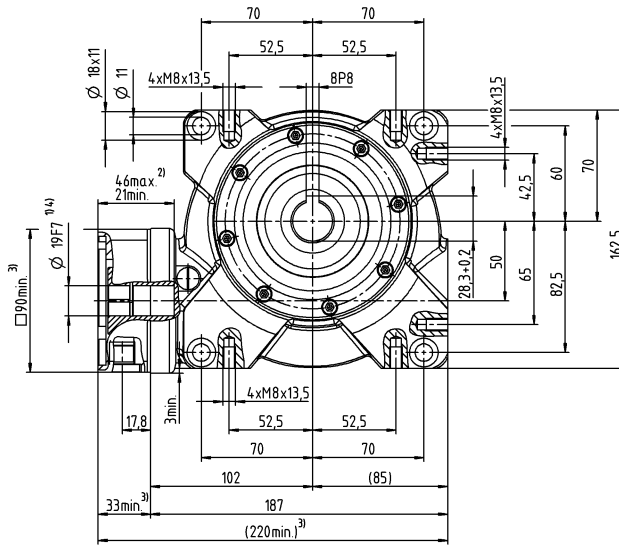

## Other output variants

Hollow shaft interfaces on both sides

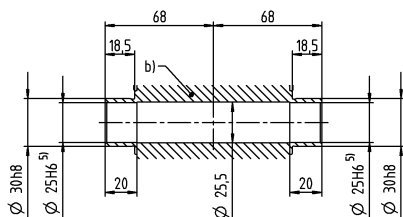

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M10 (on request)
- d) End disc as forcing washer for screw M12 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length  
Longer motor shafts are adaptable, please contact us
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum wall thickness of 1 mm
- <sup>5)</sup> Tolerance h6 for mounted shaft
- <sup>6)</sup> Standard clamping hub diameter

# CVH 063 MF 1-stage

			1-stage					
Ratio	<i>i</i>		7	10	16	28	40	
Max. torque <sup>a) b)</sup> (at $n_1 = 500$ rpm)	$T_{2a}$	Nm	265	270	280	301	282	
		in.lb	2345	2390	2478	2664	2496	
Emergency stop torque <sup>a) b)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	484	491	494	518	447	
		in.lb	4283	4345	4372	4584	3956	
Permitted average input speed <sup>d)</sup> (at 20 °C ambient temperature)	$n_{1N}$	rpm	4000					
Max. input speed	$n_{1Max}$	rpm	4500					
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	3.1	3	2.4	2.3	2.2	
		in.lb	27.4	26.6	21.2	20.4	19.5	
Max. backlash	$j_t$	arcmin	≤ 15					
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	23	23	23	23	23	
		in.lb/arcmin	204	204	204	204	204	
Max. axial force <sup>c)</sup> (Standard / HIGH FORCES)	$F_{2AMax}$	N	2000 / 8250					
		lb <sub>f</sub>	450 / 1856					
Max. lateral force <sup>b)</sup> (Standard / HIGH FORCES)	$F_{2OMax}$	N	2000 / 6000					
		lb <sub>f</sub>	450 / 1350					
Max. tilting moment (Standard / HIGH FORCES)	$M_{2KMax}$	Nm	281 / 843					
		in.lb	2487 / 7461					
Efficiency at full load (at $n_1 = 500$ rpm)	$\eta$	%	90	87	82	73	67	
Service life	$L_h$	h	> 15000					
Weight (incl. standard adapter plate)	$m$	kg	13					
		lb <sub>m</sub>	29					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 64					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	-15 to +40					
		°F	+5 to +104					
Lubrication			Lubricated for life					
Direction of rotation			See drawing					
Protection class			IP 65					
Shrink disc (Standard Version)			SD 036x072 S2V					
Max. torque (without axial force)	$T_{max}$	Nm	640					
		in.lb	5664					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	$J_1$	kgcm <sup>2</sup>	4.0	3.8	3.7	3.6	3.6
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	3.5	3.4	3.3	3.2	3.2

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

<sup>a)</sup> At max. 10 %  $F_{2OMax}$

<sup>b)</sup> Valid for standard clamping hub diameter




<sup>c)</sup> Refers to center of the output shaft or flange

<sup>d)</sup> Please reduce input speed at higher ambient temperatures

Motor shaft diameter [mm]


1-stage

up to 28<sup>4)</sup> (H)<sup>6)</sup>  
clamping hub diameter

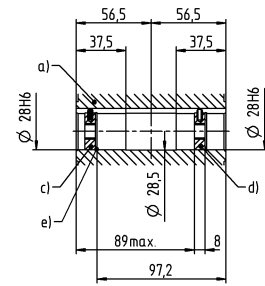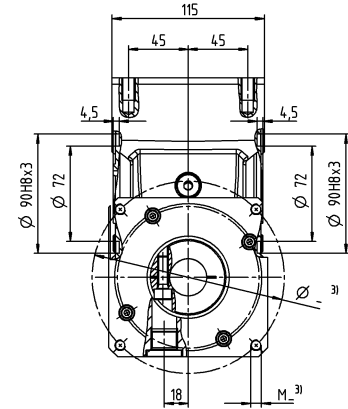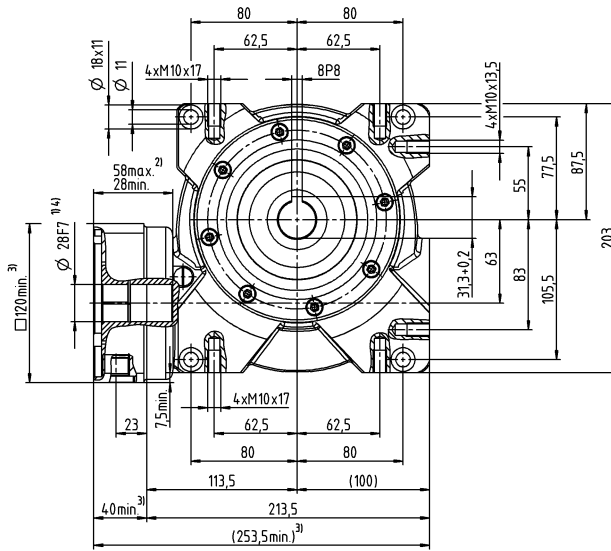

### Other output variants

Hollow shaft interfaces on both sides

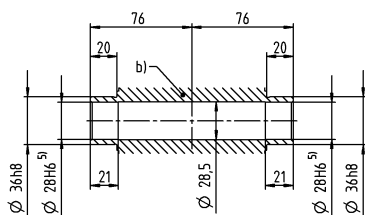

- a) Hollow shaft, keyed on both sides
- b) Hollow shaft interfaces on both sides
- c) End disc for screw M10 (on request)
- d) End disc as forcing washer for screw M12 (on request)
- e) Locking ring – DIN 472 (on request)

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length  
Longer motor shafts are adaptable, please contact us
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum wall thickness of 1 mm
- <sup>5)</sup> Tolerance h6 for mounted shaft
- <sup>6)</sup> Standard clamping hub diameter



# CVS 040 MF 1-stage

			1-stage						
Ratio	$i$		7	10	16	28	40		
Max. torque <sup>a) b) e)</sup> (at $n_1 = 500$ rpm)	$T_{2a}$	Nm	68	76	78	82	76		
		in.lb	602	673	690	726	673		
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	126	125	129	134	122		
		in.lb	1115	1106	1142	1186	1080		
Permitted average input speed <sup>d)</sup> (at 20 °C ambient temperature)	$n_{1N}$	rpm	4000						
Max. input speed	$n_{1Max}$	rpm	6000						
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	0.7	0.6	0.5	0.4	0.4		
		in.lb	6.2	5.3	4.4	3.5	3.5		
Max. backlash	$j_t$	arcmin	≤ 15						
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	3.5	3.5	3.5	3.5	3.5		
		in.lb/arcmin	31	31	31	31	31		
Max. axial force <sup>c)</sup> (Standard / HIGH FORCES)	$F_{2AMax}$	N	1200 / 3000						
		lb <sub>f</sub>	270 / 675						
Max. lateral force <sup>b)</sup> (Standard / HIGH FORCES)	$F_{2OMax}$	N	1000 / 2400						
		lb <sub>f</sub>	225 / 540						
Max. tilting moment (Standard / HIGH FORCES)	$M_{2KMax}$	Nm	97 / 205						
		in.lb	858 / 1814						
Efficiency at full load (at $n_1 = 500$ rpm)	$\eta$	%	89	87	81	72	66		
Service life	$L_n$	h	> 15000						
Weight (incl. standard adapter plate)	$m$	kg	4.5						
		lb <sub>m</sub>	10						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 54						
Max. permitted housing temperature		°C	+90						
		°F	+194						
Ambient temperature		°C	-15 to +40						
		°F	+5 to +104						
Lubrication			Lubricated for life						
Direction of rotation			See drawing						
Protection class			IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			ELC - 00060B - 016.000 - X						
Bore diameter of coupling on the application side		mm	X = 016.000 - 032.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	$J_1$	kgcm <sup>2</sup>	0.42	0.39	0.37	0.36	0.35
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.37	0.35	0.33	0.32	0.31
	E	19	$J_1$	kgcm <sup>2</sup>	0.74	0.70	0.68	0.68	0.67
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	0.65	0.62	0.60	0.6	0.59



Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

- <sup>a)</sup> At max. 10 %  $F_{2OMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Valid for: Smooth shaft

Motor shaft diameter [mm]



1-stage

up to 14/19<sup>4)</sup> (C<sup>6)</sup>/E)  
clamping hub diameter

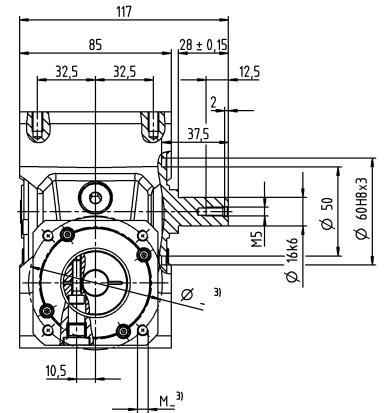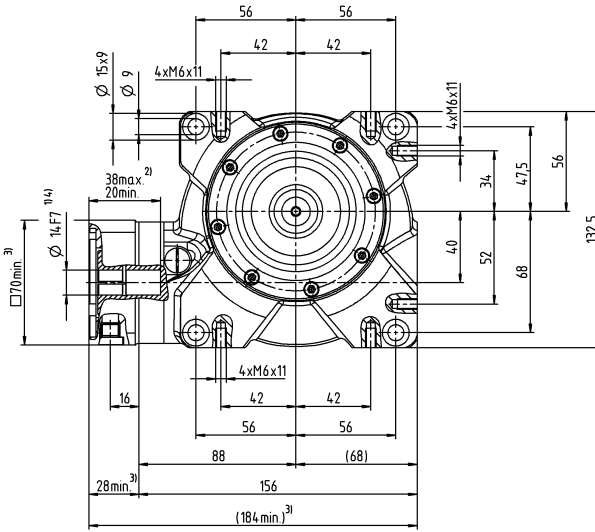

A<sup>51</sup>


B<sup>51</sup>

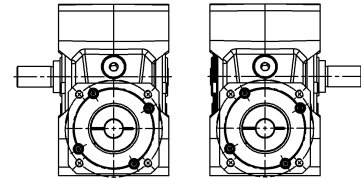

Optional dual-shaft output. Drawings available on request.  
Involute gearing is not possible.

### Other output variants

Shaft with key

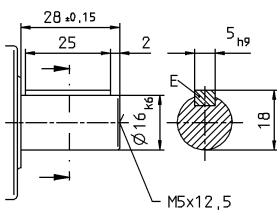

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

<sup>1)</sup> Check motor shaft fit

<sup>2)</sup> Min./Max. permissible motor shaft length

Longer motor shafts are adaptable, please contact us

<sup>3)</sup> The dimensions depend on the motor

<sup>4)</sup> Smaller motor shaft diameter is compensated by a

bushing with a minimum wall thickness of 1 mm

<sup>5)</sup> Output side

<sup>6)</sup> Standard clamping hub diameter

# CVS 050 MF 1-stage

			1-stage						
Ratio	$i$		7	10	16	28	40		
Max. torque <sup>a) b) e)</sup> (at $n_1 = 500$ rpm)	$T_{2a}$	Nm	125	127	131	140	116		
		in.lb	1106	1124	1159	1239	1027		
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	242	242	250	262	236		
		in.lb	2142	2142	2213	2319	2089		
Permitted average input speed <sup>d)</sup> (at 20 °C ambient temperature)	$n_{1N}$	rpm	4000						
Max. input speed	$n_{1Max}$	rpm	6000						
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	2.2	1.6	1.5	1.2	1.1		
		in.lb	19.5	14.2	13.3	10.6	9.7		
Max. backlash	$j_t$	arcmin	≤ 15						
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	5.5	5.5	5.5	5.5	5.5		
		in.lb/arcmin	49	49	49	49	49		
Max. axial force <sup>c)</sup> (Standard / HIGH FORCES)	$F_{2AMax}$	N	1500 / 5000						
		lb <sub>f</sub>	337.5 / 1125						
Max. lateral force <sup>b)</sup> (Standard / HIGH FORCES)	$F_{2OMax}$	N	1200 / 3800						
		lb <sub>f</sub>	270 / 855						
Max. tilting moment (Standard / HIGH FORCES)	$M_{2KMax}$	Nm	130 / 409						
		in.lb	1150 / 3620						
Efficiency at full load (at $n_1 = 500$ rpm)	$\eta$	%	89	85	80	70	63		
Service life	$L_h$	h	> 15000						
Weight (incl. standard adapter plate)	$m$	kg	8						
		lb <sub>m</sub>	18						
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 62						
Max. permitted housing temperature		°C	+90						
		°F	+194						
Ambient temperature		°C	-15 to +40						
		°F	+5 to +104						
Lubrication			Lubricated for life						
Direction of rotation			See drawing						
Protection class			IP 65						
Elastomer coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			ELC - 00150B - 022.000 - X						
Bore diameter of coupling on the application side		mm	X = 022.000 - 036.000						
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	$J_1$	kgcm <sup>2</sup>	1.2	1.1	1.0	0.97	1.0
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	1.1	0.97	0.89	0.86	0.89
	G	24	$J_1$	kgcm <sup>2</sup>	1.3	1.2	1.1	1.1	1.2
				10 <sup>-3</sup> in.lb.s <sup>2</sup>	1.2	1.1	0.97	0.97	1.1

Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

<sup>a)</sup> At max. 10 %  $F_{2OMax}$

<sup>b)</sup> Valid for standard clamping hub diameter

<sup>c)</sup> Refers to center of the output shaft or flange




<sup>d)</sup> Please reduce input speed at higher ambient temperatures

<sup>e)</sup> Valid for: Smooth shaft

Motor shaft diameter [mm]

1-stage

up to 19/24<sup>4)</sup> (E<sup>6)</sup>/G)  
clamping hub diameter

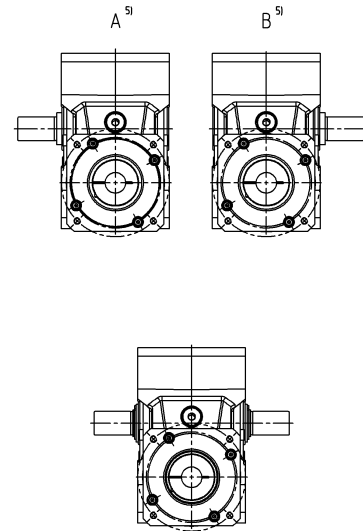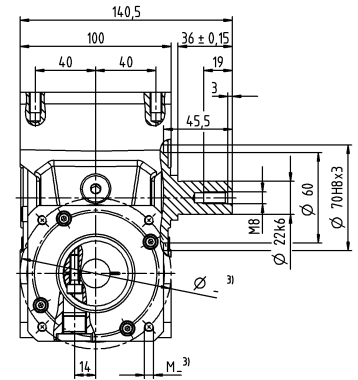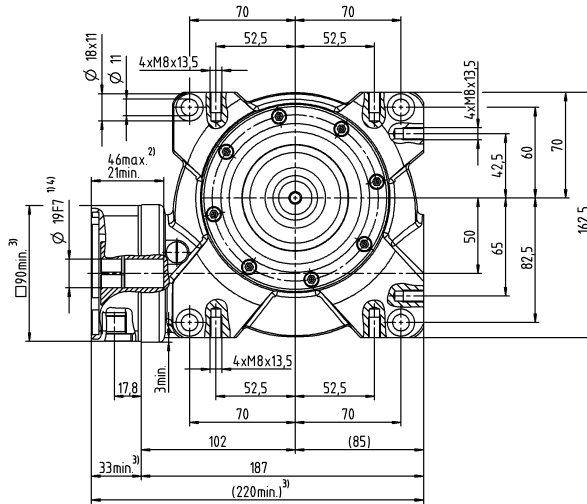


Worm Gearboxes  
Basic Line

Optional dual-shaft output. Drawings available on request.  
Involute gearing is not possible.

Other output variants

Shaft with key

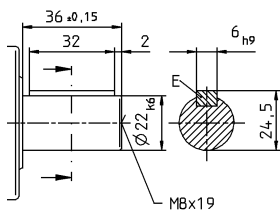

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

- Non-tolerated dimensions are nominal dimensions
- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length  
Longer motor shafts are adaptable, please contact us
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum wall thickness of 1 mm
- <sup>5)</sup> Output side
- <sup>6)</sup> Standard clamping hub diameter

# CVS 063 MF 1-stage

			1-stage					
Ratio	$i$		7	10	16	28	40	
Max. torque <sup>a) b) e)</sup> (at $n_1 = 500$ rpm)	$T_{2a}$	Nm	265	270	280	301	282	
		in.lb	2345	2390	2478	2664	2496	
Emergency stop torque <sup>a) b) e)</sup> (permitted 1000 times during the service life of the gearbox)	$T_{2Not}$	Nm	484	491	494	518	447	
		in.lb	4283	4345	4372	4584	3956	
Permitted average input speed <sup>d)</sup> (at 20 °C ambient temperature)	$n_{1N}$	rpm	4000					
Max. input speed	$n_{1Max}$	rpm	4500					
Mean no load running torque <sup>b)</sup> (at $n_1 = 3000$ rpm and 20 °C gearbox temperature)	$T_{012}$	Nm	3.1	3	2.4	2.3	2.2	
		in.lb	27.4	26.6	21.2	20.4	19.5	
Max. backlash	$j_t$	arcmin	≤ 15					
Torsional rigidity <sup>b)</sup>	$C_{t21}$	Nm/arcmin	23	23	23	23	23	
		in.lb/arcmin	204	204	204	204	204	
Max. axial force <sup>c)</sup> (Standard / HIGH FORCES)	$F_{2AMax}$	N	2000 / 8250					
		lb <sub>f</sub>	450 / 1856					
Max. lateral force <sup>b)</sup> (Standard / HIGH FORCES)	$F_{2OMax}$	N	2000 / 6000					
		lb <sub>f</sub>	450 / 1350					
Max. tilting moment (Standard / HIGH FORCES)	$M_{2KMax}$	Nm	281 / 843					
		in.lb	2487 / 7461					
Efficiency at full load (at $n_1 = 500$ rpm)	$\eta$	%	90	87	82	73	67	
Service life	$L_n$	h	> 15000					
Weight (incl. standard adapter plate)	$m$	kg	13					
		lb <sub>m</sub>	29					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex <sup>®</sup> )	$L_{PA}$	dB(A)	≤ 64					
Max. permitted housing temperature		°C	+90					
		°F	+194					
Ambient temperature		°C	-15 to +40					
		°F	+5 to +104					
Lubrication			Lubricated for life					
Direction of rotation			See drawing					
Protection class			IP 65					
Elastomer coupling (recommended product type – validate sizing with cymex <sup>®</sup> )			ELC - 00150B - 032.000 - X					
Bore diameter of coupling on the application side		mm	X = 032.000 - 036.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	H 28	$J_1$	kgcm <sup>2</sup>	4.0	3.8	3.7	3.6	3.6
			10 <sup>-3</sup> in.lb.s <sup>2</sup>	3.5	3.4	3.3	3.2	3.2




Please use our sizing software cymex<sup>®</sup> for a detailed sizing – [www.wittenstein-cymex.com](http://www.wittenstein-cymex.com)

- <sup>a)</sup> At max. 10 %  $F_{2OMax}$
- <sup>b)</sup> Valid for standard clamping hub diameter
- <sup>c)</sup> Refers to center of the output shaft or flange
- <sup>d)</sup> Please reduce input speed at higher ambient temperatures
- <sup>e)</sup> Valid for: Smooth shaft

Motor shaft diameter [mm]

1-stage

up to 28<sup>4)</sup> (H)<sup>6)</sup>  
clamping hub diameter

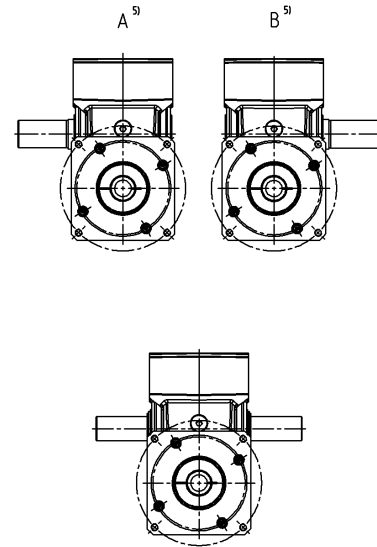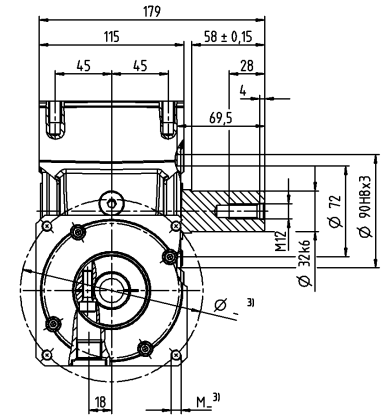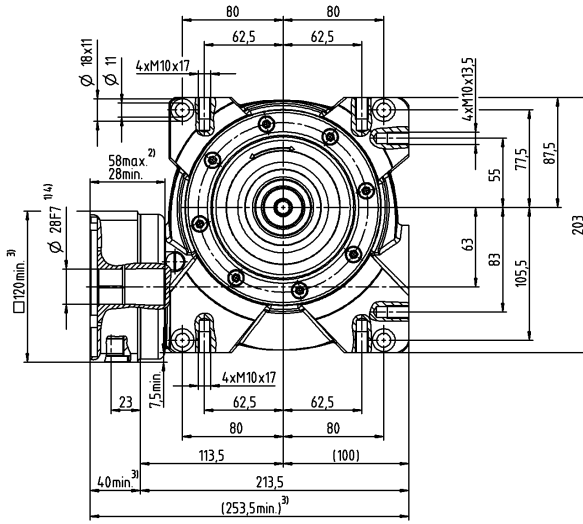


Worm Gearboxes  
Basic Line


Optional dual-shaft output. Drawings available on request.  
Involute gearing is not possible.

Other output variants

Shaft with key

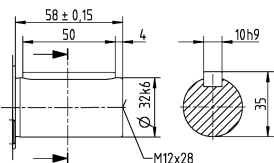

Shaft with parallel key on both sides

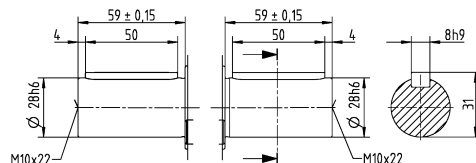

See technical data sheet for available clamping hub diameters (mass moment of inertia). Dimensions available on request.

Non-tolerated dimensions are nominal dimensions

- <sup>1)</sup> Check motor shaft fit
- <sup>2)</sup> Min./Max. permissible motor shaft length  
Longer motor shafts are adaptable, please contact us
- <sup>3)</sup> The dimensions depend on the motor
- <sup>4)</sup> Smaller motor shaft diameter is compensated by a bushing with a minimum wall thickness of 1 mm
- <sup>5)</sup> Output side
- <sup>6)</sup> Standard clamping hub diameter